

# Ecoroof Traditional

EAD 220020-00-0402  
DoP N° 017




## Description:

Single-layer flexible bituminous shingle, with glass fiber carrier and protected by colored ceramic-coated basalt.

## Application:

Application on pitched roofs, with a slope between 5° and 85°. Installation temperature above +5°C. Always check the adhesion of the pads or of the shingle at the end of the installation.

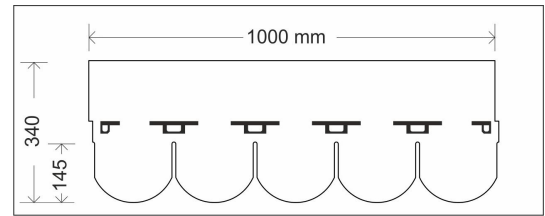

## GENERAL INFORMATION

	Norm	Unit of Measure	Value	Tolerance
Bitumen Type / Compound Type	-		Oxidized Bitumen	
Length	EN 544	mm	1000	±3
Width	EN 544	mm	340	±3
Thickness	-	mm	3.0	±5%
Exposed Area	EN 544	mm	145	-
Height of Slits	-	mm	>143	-
Adhesion System	-		Self-Adhesive Pads	

## PHYSICAL-CHEMICAL PROPERTIES

	Norm	Unit of Measure	Value	Tolerance
Weight (Finished Product)	-	kg/m <sup>2</sup>	9.4	±10%
Bitumen per Single Layer	EN 544	g/m <sup>2</sup>	>1000	-
Tensile Strength MD/CMD	EN 12311-1	N/50mm	>600 / >400	-
Resistance to Tearing (Nail Shank Method)	EN 12310-1	N	>100	-
Water Absorption	EN 544	%	<2	-
Resistance to UV Radiation	EN 1297	Visual	Pass	-
Resistance to Blistering	EN 544	Visual	Pass	-
Flow Resistance, at 90°C	EN 1110	mm	<1	-
Granules Adhesion	EN 12039	-g	<1.2	-

## FIRE BEHAVIOR

	Norm	Unit of Measure	Value	Tolerance
External Fire Resistance	EN 13501-5 / EN 1187		Roof (t1)	
Reaction to Fire	EN 13501-1 / prEN ISO 11925-2		E	

## PACKAGING

	Norm	Unit of Measure	Value	Tolerance
Type			Polyethylene Film	
Shingles per Bundle			16	
m <sup>2</sup> /Bundle			2.32	
m <sup>2</sup> /Pallet			185.60	
Pallet Weight (Standard Packaging)		Kg	1470 - 1720	

## Safety:

The material is free of asbestos, tar compounds and other dangerous substances.

## Storage:

Store pallets in closed warehouses, away from heat sources and direct sunlight. Store in the original packaging. Do not stack pallets.

## Other information:

The characteristics expressed refer to the standard production. Tegola Canadese reserves the right to update the technical data sheets without notice. Further information on installation available on [www.tegolacanedese.com](http://www.tegolacanedese.com).



Tegola Canadese srl.  
Via dell'Industria, 21- 31029 Vittorio V.to (TV) - ITA -  
Tel. +39.0438.9111 - e-mail: [info@tegolacanedese.com](mailto:info@tegolacanedese.com)  
<https://www.tegolacanedese.com/>

